

**Profile system**

- ☐ Framed slide and turn system
- ☐ Non-thermally insulated aluminum profiles with insulated glass
- ☐ Option of flush or weathered bottom track
- ☐ The flush bottom track is particularly suitable for use in „Barrier-free dwellings“ according to DIN 18 025
- ☐ Panels can be stacked open either internally or externally
- ☐ Opening of panels by sliding to one side or to both sides
- ☐ Optionally with or without lateral vertical frame profiles
- ☐ Height variations can be compensated by a height compensation profile

**Tests**

- ☐ Airborne sound insulation  $R_w = 30$  dB according to DIN EN ISO 140-3
- ☐ Measurement of deflection class 3 according to DIN EN 12211/12210 (20 mm glass (4/12/4))
- ☐ Repeated pressure/wind suction class 3 according to DIN EN 12211/12210 (20 mm glass (4/12/4))
- ☐ Safety test class 3 according to DIN EN 12211/12210 (20 mm glass (4/12/4))

**Fittings**

- ☐ All fittings are concealed within the profiles
- ☐ Low-maintenance, non-corroding and failsafe fittings
- ☐ Inside and/or outside locking and unlocking possible
- ☐ Locking and unlocking via pull rod or turning knob
- ☐ Optionally with lever lock („child-proof“)

**Running assembly**

- ☐ Top running, low-maintenance horizontal running assemblies, each equipped with two rollers
- ☐ The running assemblies feature each three smooth-running needle bearings and two carbon fibre reinforced polyamide rollers
- ☐ Running assemblies out of stainless steel metal components
- ☐ Low-noise, low-wear, heat and cold resistant running surfaces
- ☐ Running assemblies pivot at any angle between 90° and 180°

**Sealing and ventilation**

- ☐ Tongue and groove system between the panels
- ☐ Brush gaskets are fitted horizontally at the top and bottom on the inside and outside
- ☐ Lower and upper brush gaskets are attached to the panel frames and not to the guide track


**Glazing**

- ☐ Insulated glass of 18 or 20 mm possible
- ☐ Subsequent replacement of panels without difficulty

**Drainage**


- ☐ Unpressurised drainage via inclined floor construction
- ☐ Integrated water drainage channel on inside of bottom track
- ☐ End-caps for lateral sealing of bottom track

## Straight Systems


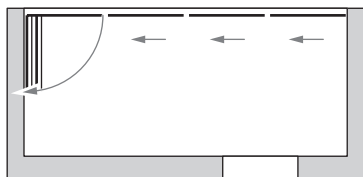


more special Systems on request


## Segmented Systems

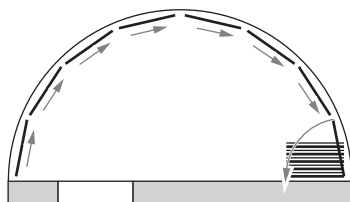


## Angle Solutions 90°-180°

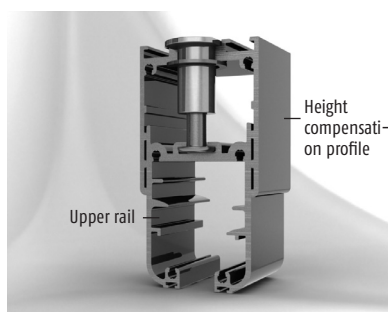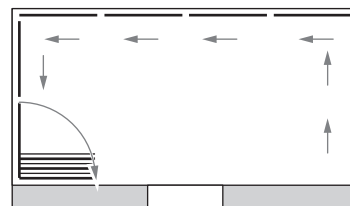


- ☐ Slightly arched running surfaces for carriage to improve running features
- ☐ Modified height compensation profile allows an adjustment of up to 22 mm

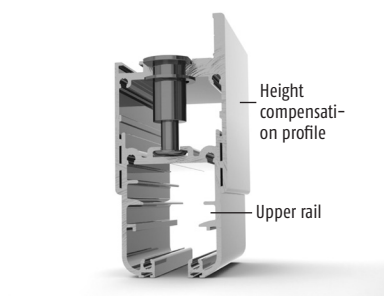

- ☐ Height compensation profile with flange

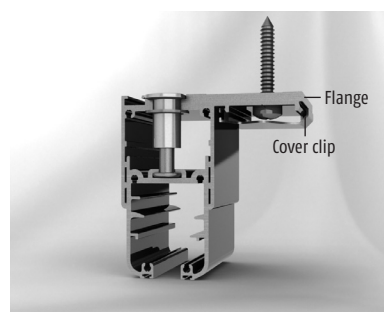


- ☐ Height compensation profile with flange
- ☐ Screw cap with cover clip

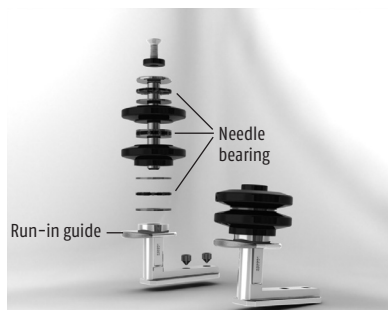

- ☐ Completely new, stainless carriage system
- ☐ Arched run-in guide




- ☐ New panel profile end caps for 6, 8 and 10 mm including pick-up for glass panel t-slot nut and cover clip fixing device
- ☐ Panel guidance for recessed floor rail

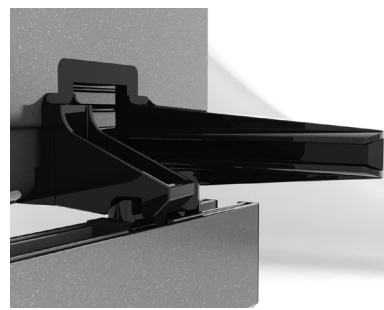


- ☐ Carriage recess including new gap ventilation



- ☐ Carriage recess optionally available without guide arm but with covering flap

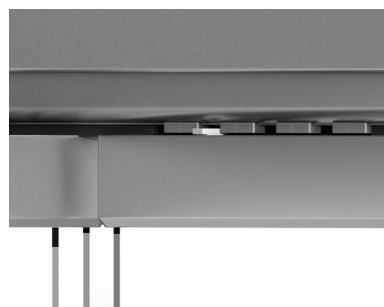


- ☐ Optimal panel guidance without guide arm when opening and closing

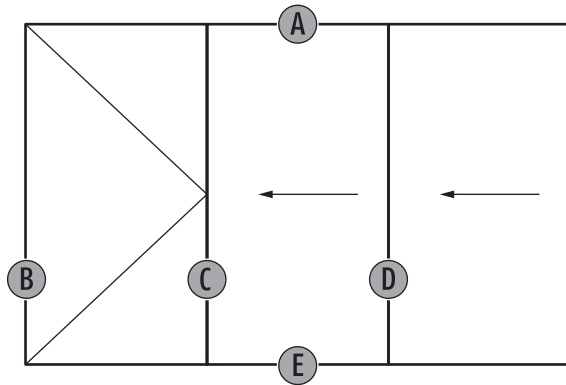

Details at uneven panel partitioning in one direction

Panel size diagram

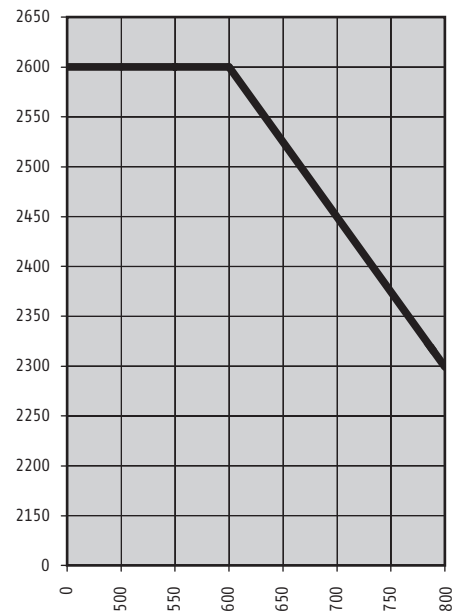

\* For panel sizes exceeding 2600 mm – special inquiry




\* Basis glazing 18 mm (25 kg/m<sup>2</sup>)

Ref.	Section	Description	Page
E	SF35-003	Vertical-Section, bottom track	4
E	SF35-004	Vertical-Section, flush bottom track	4
E	SF35-011	Vertical-Section, flush bottom track with support profile	4
E	SF35-010	Vertical-Section, bottom track	4
A	SF35-009	Vertical-Section, bottom track on balustrade connector	5
A	SF35-008	Vertical-Section, bottom track on balustrade and strengthening profile	5
A	SF35-001	Vertical-Section, top track	5
A	SF35-002	Vertical-Section, top track with height compensations profile	5
A	SF35-005	Vertical-Section, height compensations profile with flange - horizontal	6
A	SF35-006	Vertical-Section, height compensations profile with flange - vertical	6
A	SF35-007	Vertical-Section, overhead light connection with height compensation profile	6
D	SF35-101	Horizontal-Section, panel - panel	6
C	SF35-102	Horizontal-Section, turn panel - slide panel	7
B	SF35-103	Horizontal-Section, sidewise wall connection	7
D	SF35-104	Horizontal-Section, panel - panel 90°- bending	7

<div><div>E</div><div><div>OUTSIDE</div><div></div><div>INSIDE</div></div></div> <div><div>Description: Vertical-Section, bottom track</div><div>System: SF35 Detail-No.: SF35-003</div></div>		<div><div>E</div><div><div>OUTSIDE</div><div></div><div>INSIDE</div></div></div> <div><div>Description: Vertical-Section, flush bottom track</div><div>System: SF35 Detail-No.: SF35-004</div></div>	
<div><div>E</div><div><div>OUTSIDE</div><div></div><div>INSIDE</div></div></div> <div><div>Description: Vertical-Section, flush bottom track with support profile</div><div>System: SF35 Detail-No.: SF35-011</div></div>		<div><div>E</div><div><div>OUTSIDE</div><div></div><div>INSIDE</div></div></div> <div><div>Description: Vertical-Section, bottom track</div><div>System: SF35 Detail-No.: SF35-010</div></div>	

<p><b>A</b></p> <p>OUTSIDE</p> <p>INSIDE</p>	<p><b>A</b></p> <p>OUTSIDE</p> <p>INSIDE</p>
<p>Description: Vertical-Section, bottom track on balustrade connector</p> <p>System: SF35</p> <p>Detail-No.: SF35-009</p>	<p>Description: Vertical-Section, bottom track on balustrade and strengthening profile</p> <p>System: SF35</p> <p>Detail-No.: SF35-008</p>
<p><b>A</b></p> <p>OUTSIDE</p> <p>INSIDE</p>	<p><b>A</b></p> <p>OUTSIDE</p> <p>INSIDE</p>
<p>Description: Vertical-Section, top track</p> <p>System: SF35</p> <p>Detail-No.: SF35-001</p>	<p>Description: Vertical-Section, top track with height compensations profile</p> <p>System: SF35</p> <p>Detail-No.: SF35-002</p>

<div><div>A</div><div><div><div>OUTSIDE</div><div>153.5 mm 6 1/16"</div><div>53 mm 2 1/16"</div><div>3.5 mm 1/8"</div><div>97 mm 3 13/16"</div><div>60 mm 2 3/8"</div></div><div><div>96.5 mm 3 13/16"</div><div>45 mm 1 3/4"</div><div>86 mm 3 3/8"</div><div>108 mm 4 1/4"</div></div><div><div>INSIDE</div></div></div></div>	<div><div>A</div><div><div><div>OUTSIDE</div><div>108 mm 4 1/4"</div><div>86 mm 3 3/8"</div></div><div><div>51 mm 2"</div><div>45.5 mm 1 13/16"</div><div>20 mm 13/16"</div><div>60 mm 2 3/8"</div><div>97 mm (3 13/16")</div><div>117 mm 4 5/8"</div><div>173.5 mm 6 13/16"</div></div><div><div>INSIDE</div></div></div></div>
<div><div>Description: Vertical-Section, height compensations profile with flange - horizontal</div><div><div>System: SF35</div><div>Detail-No.: SF35-005</div></div></div>	<div><div>Description: Vertical-Section, height compensations profile with flange - vertical</div><div><div>System: SF35</div><div>Detail-No.: SF35-006</div></div></div>
<div><div>A</div><div><div><div>OUTSIDE</div><div>153.5 mm 6 1/16"</div><div>53 mm 2 1/16"</div><div>3.5 mm 1/8"</div><div>97 mm 3 13/16"</div><div>60 mm 2 3/8"</div></div><div><div>45 mm 1 3/4"</div><div>58.6 mm 2 5/16"</div><div>86 mm 3 3/8"</div><div>108 mm 4 1/4"</div></div><div><div>INSIDE</div></div></div></div>	<div><div>D</div><div><div><div>OUTSIDE</div><div>59 mm 2 5/16"</div><div>45 mm 1 3/4"</div></div><div><div>15 mm 9/16"</div><div>25 mm 1"</div><div>41 mm 1 5/8"</div></div><div><div>INSIDE</div></div></div></div>
<div><div>Description: Vertical-Section, overhead light connection with height compensation profile</div><div><div>System: SF35</div><div>Detail-No.: SF35-007</div></div></div>	<div><div>Description: Horizontal-Section, panel - panel</div><div><div>System: SF35</div><div>Detail-No.: SF35-101</div></div></div>
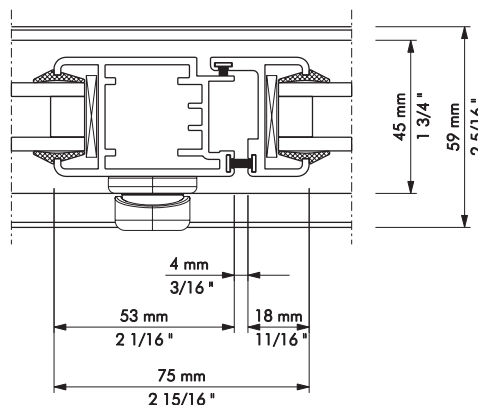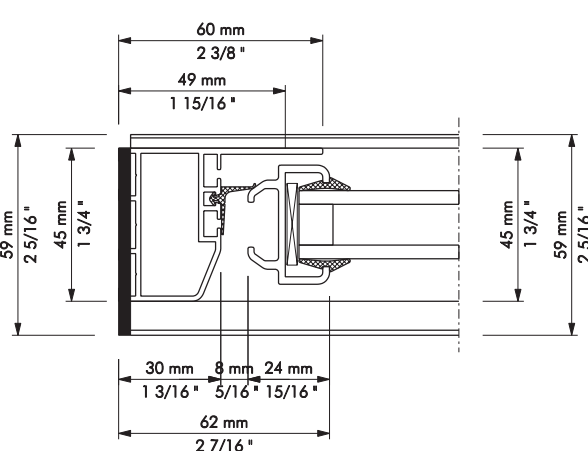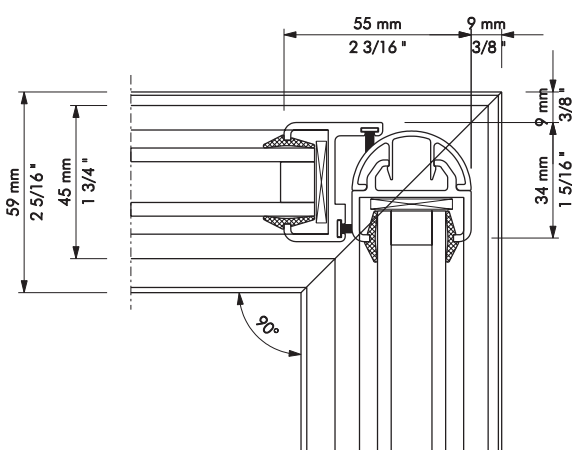
<div>C</div>	<div>OUTSIDE</div>  <div>INSIDE</div>	<div>Description: Horizontal-Section, turn panel - slide panel</div> <div>System: SF35</div> <div>Detail-No.: SF35-102</div>
<div>B</div>	<div>OUTSIDE</div>  <div>INSIDE</div>	<div>Description: Horizontal-Section, sidewise wall connection</div> <div>System: SF35</div> <div>Detail-No.: SF35-103</div>
<div>D</div>	<div>OUTSIDE</div>  <div>INSIDE</div>	<div>Description: Horizontal-Section, panel - panel 90°- bending</div> <div>System: SF35</div> <div>Detail-No.: SF35-104</div>

NewGlassTechnology

Where progress never stops

Tel: 003293955599

Fax: 003293955099

[info@newglasstech.com](mailto:info@newglasstech.com)

<http://newglasstech.com>