

CONTRAFLAM® LITE 60 Horizontal

Fire resistant safety glass for interior application

CLASSIFICATION

EW = Integrity +
Radiation reduction

Ability to withstand fire exposure without transmission of fire to the non-fire side as a result of the passage of flames or hot gases, thereby causing ignition of the non-fire exposed surface or materials adjacent. Also maintains radiated heat in front of the glazing below a specified level to provide for safer separation distances and escape ways.


PRODUCT FEATURES

Toughened safety glass

Intumescent Interlayer

Edge Sealant

Laminated safety glass

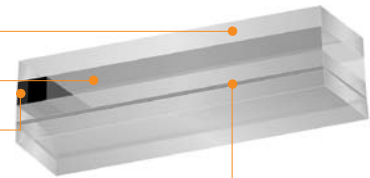

TECHNICAL SPECIFICATIONS

Fire resistance (EN 13501-2)

Reaction to fire (EN 13501-1)

Maximum Glass Size

Thickness tolerance

Length tolerance

Impact resistance (EN 12600)

UV stability (EN ISO 12543-4 point 6)

Application Conditions

CE certificate No. of conformity

Hazardous material contained

EW 60

B-s1, d2

Variable, subject to glass make-up, framing material or glazed element type.

Consult with your Vetrotech representative.

+2/-1 mm

±2 mm

1 (B) 1 classification

In addition to the standard specifications: no formation of bubbles or yellowing after 2000 hours of exposure to radiation.

Avoid prolonged exposure to extreme temperatures. Exterior applications must be supplied as an IGU with Low-E or Solar Control coating. For more information consult your Vetrotech representative or refer to "Quality Guideline, Application Conditions".

0336-CPD-5064C/ID No.* (you can obtain a DoP*** from your national sales office) - AoC-level 1

None

Nominal thickness

Weight

Sound reduction R_w (EN 140-3)

Light transmission (EN 410)

Light reflection ρ_L (outside/inside)

U value, W/m^2K (EN 673) (0°/40°)

g value

Energy transmission τ_E

Energy reflection ρ_E (outside/inside)

19 mm (with laminated safety glass 44.2, other combinations are possible)

40 kg/m²

NPD***

84%

8%/8%

4,9 (5,7/5,7)

0,69

59%

7%/7%

* ID No. = Identification number for the relevant manufacturing site

** Declaration of Performances

*** NPD = No Performance Declared